




FIREFLY VISUAL

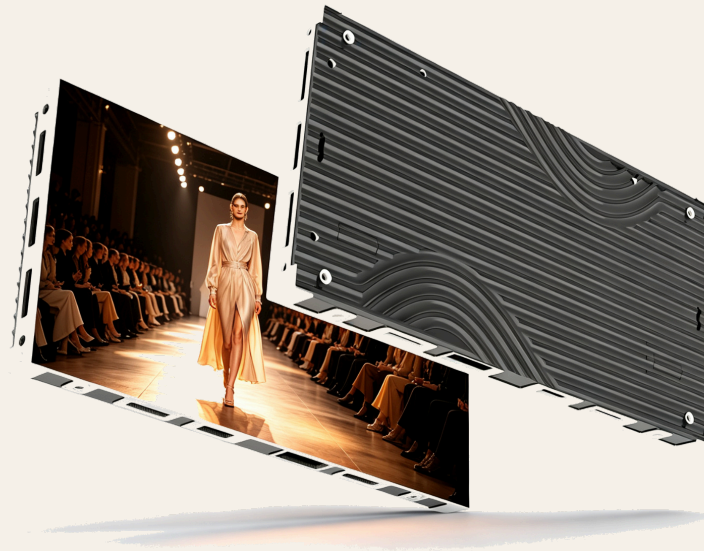

Fortis Series

Indoor Fixed LED Display



Front Maintenance

Full front access, zero space constraint for installation and maintenance.



Ultra-thin & Lightweight

Only 33mm thickness, die-cast aluminum body, lightest cabinet only 3kg.



High Refresh Rate

3840-7680 Hz refresh rate, stable under camera, no scan lines.



RETAIL & LUXURY

Technical Specifications

Specifications

PHYSICAL	
Pixel Pitch	1.95 mm
Pixel Density	262,144 dots/m²
Module Size	250 × 250 mm
Module Resolution	128 × 128
Cabinet Size	1000×500×33 / 1000×250×33 / 750×250×33 / 500×250×33 mm
Cabinet Resolution	512×256 / 512×128 / 384×128 / 256×128
Cabinet Weight	9.8 / 5.0 / 4.0 / 3.0 kg
Cabinet Material	Die-cast aluminium

OPTOELECTRONIC	
Driving Mode	1/32 scan
Brightness	800 cd/m²
Refresh Rate	3840–7680 Hz
Viewing Angle	160° / 160°
Gray Scale	14 / 16 bit optional
Contrast Ratio	—

OTHER	
Control Mode	Synchronous / Asynchronous
IP Rating	IP31 (front / rear)
Maintenance	Full front service
Installation	Wall mounted / Hanging / Double-sided hanging / Floor-standing (Poster)
Power Supply	90–240 V · max 350 W/m² · ave 100–200 W/m²
Certificate	CE / FCC

Dimension Drawing

